


OGE500



Through-beam sensor receiver

OGE-FPKG/US100

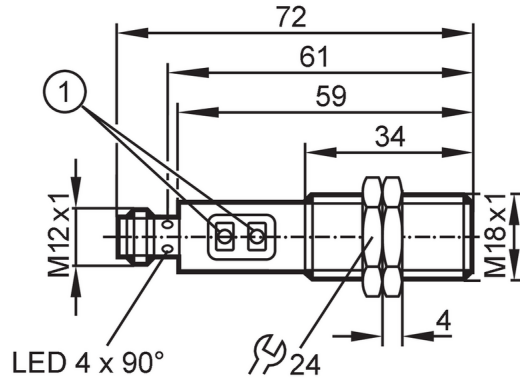

1 Programming buttons



Product characteristics

Type of light	red light
Housing	Threaded type

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	11
Protection class		II
Reverse polarity protection		yes
Type of light		red light
Wave length	[nm]	624

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (programmable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	150; (200 (...60 °C))
Switching frequency DC	[Hz]	1000
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes

Monitoring range

Transmitter / receiver		receiver
Range	[m]	< 25
Factory setting		dark-on mode
Range adjustable		yes

Operating conditions

Ambient temperature	[°C]	-25...80
---------------------	------	----------

OGE500



Through-beam sensor receiver

OGE-FPKG/US100

Protection	IP 67
------------	-------

Tests / approvals

EMC	EN 60947-5-2
-----	--------------

MTTF [years]	786
--------------	-----

Mechanical data

Weight [g]	50
------------	----

Housing	Threaded type
---------	---------------

Dimensions [mm]	M18 x 1 / L = 72
-----------------	------------------

Thread designation	M18 x 1
--------------------	---------

Material	stainless steel (1.4404 / 316L); PA; LCP; EPDM; TPU (urethane)
----------	--

Lens material	front lens:PMMA
---------------	-----------------

Displays / operating elements

Display	Switching status	1 x LED, yellow
---------	------------------	-----------------

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Remarks	cULus - Class 2 source required
---------	---------------------------------


Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A



Connection

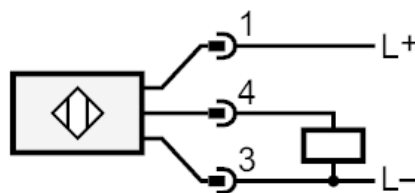

OGE500



Through-beam sensor receiver

OGE-FPKG/US100

Diagrams and graphs

excess gain graph

