



Through-beam sensor receiver


OGE-FPKG/US-100

Article no longer available - archive entry

Alternative articles: OGE200 + OGS200 or OGE500 + OGS500

When selecting an alternative article and accessories please note that technical data may differ!

Bedingt_durch_die_geaenderte_Lichtart_muessen_Sender_und_Empfaenger_zusammen_ersetzt_werden

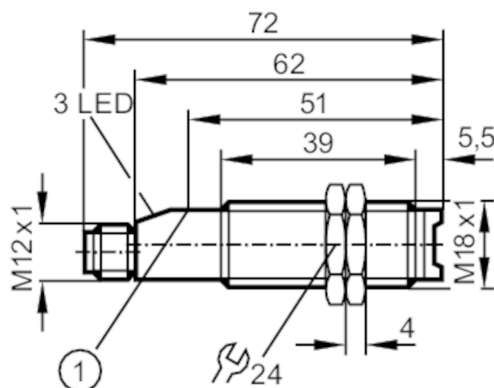

1 pushbutton

Product characteristics

Type of light	Infrared light
Housing	Threaded type

Application

System	gold-plated contacts; Function check output
Function principle	Through-beam sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 24
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	880

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (configurable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	500
Short-circuit protection		yes



Through-beam sensor receiver

OGE-FPKG/US-100

Type of short-circuit protection	yes (non-latching)
Overload protection	yes

Monitoring range

Transmitter / receiver	receiver
Range [m]	< 15
Range adjustable	yes

Operating conditions

Ambient temperature [°C]	-25...80
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 72
Thread designation	M18 x 1
Material	PBT
Lens material	PMMA

Displays / operating elements

Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
	Function	1 x LED, red

Accessories

Items supplied	lock nuts: 2
----------------	--------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



Through-beam sensor receiver

OGE-FPKG/US-100

Connection



2 Function check output

Diagrams and graphs

excess gain graph

