


Retro-reflective sensor

OTR-FNKG

Article no longer available - archive entry

Alternative articles: O5P502

When selecting an alternative article and accessories please note that technical data may differ!

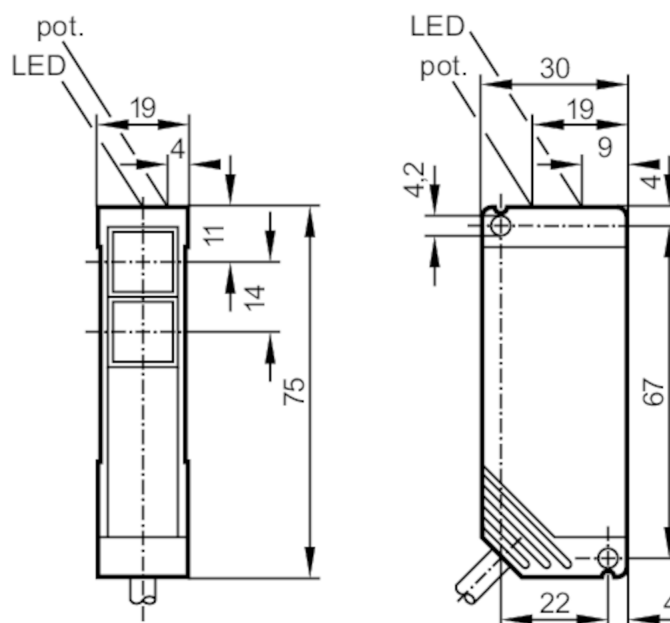

- 1 potentiometer
 Receiver in lower lens
 Transmitter in upper lens

Product characteristics

Type of light	Infrared light
Housing	rectangular

Application

Function principle	Retro-reflective sensor
--------------------	-------------------------

Electrical data

Operating voltage	[V]	10...55 DC
Current consumption	[mA]	40; ((24 V))
Protection class		II
Reverse polarity protection		yes
Type of light		Infrared light
Wave length	[nm]	880

Outputs

Electrical design		NPN
Output function		light-on/dark-on mode; (configurable)
Max. voltage drop switching output DC	[V]	2.5
Permanent current rating of switching output DC	[mA]	250
Switching frequency DC	[Hz]	150
Short-circuit protection		yes

OT5012



Retro-reflective sensor

OTR-FNKG

Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	
Monitoring range		
Range [m]	0.15...5; (Prismatic reflector Ø 80 E20005)	
Range adjustable	yes	
Max. light spot diameter [mm]	262	
Light spot dimensions refer to	at maximum range	
Operating conditions		
Ambient temperature [°C]	-25...60	
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
Mechanical data		
Weight [g]	0.208	
Housing	rectangular	
Dimensions [mm]	75 x 19 x 30	
Material	PBT	
Lens material	PMMA	
Displays / operating elements		
Display	Switching status	1 x LED, yellow
	Power	1 x LED, green
Accessories		
Items supplied	Angle bracket: 1, E20441	
	screwdrivers	
Remarks		
Pack quantity	1 pcs.	



Retro-reflective sensor

OTR-FNKG

Electrical connection

Cable: 2 m, PVC; 3 x 0.34 mm²

Connection



BN = brown
BU = blue
BK = black

Diagrams and graphs

excess gain graph

