
RO6347

Incremental encoder with hollow shaft

RO-2500-I24/N1U



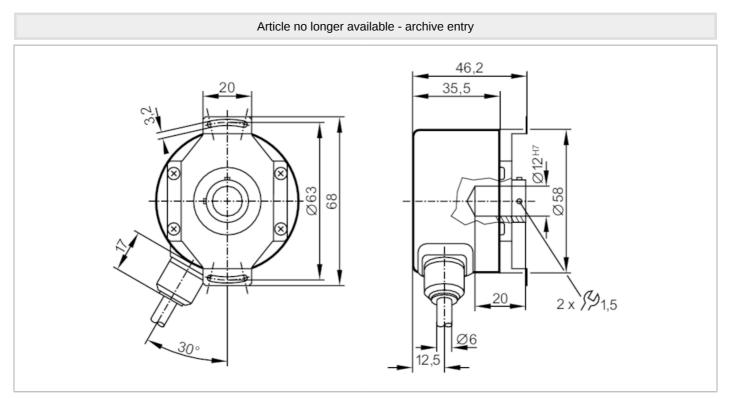

CE

| Product characteristics | | |
|----------------------------------|-------|-------------------------------|
| Resolution | | 2500 resolution |
| Shaft design | | hollow shaft open to one side |
| Shaft diameter | [mm] | 12 |
| Electrical data | | |
| Operating voltage | [V] | 1030 DC |
| | | |
| Current consumption | [mA] | < 150 |
| Outputs | | |
| Electrical design | | HTL |
| Max. current load per output | [mA] | 20 |
| Switching frequency | [kHz] | 160 |
| Type of short-circuit protection | | < 60 s |
| Phase difference A und B | [°] | 90 |
| Measuring/setting range | | |
| Resolution | | 2500 resolution |
| Operating conditions | | |
| Ambient temperature | [°C] | -3090 |
| Note on ambient temperature | | Up < 18 V: -30100 °C |
| Storage temperature | [°C] | -30100 |
| Max. relative air humidity | [%] | 98 |
| Protection | | IP 64 |

RO6347

Incremental encoder with hollow shaft





| Tests / approvals | | | | |
|--|---------------|--|--|--|
| Shock resistance | | 100 g (6 ms) | | |
| Vibration resistance | | 10 g (552000 Hz) | | |
| Mechanical data | | | | |
| Dimensions | [mm] | Ø 58 / L = 35.5 | | |
| Material | | aluminum | | |
| Max. revolution, mechanical [U/min] | | 12000 | | |
| Max. starting torque | [Nm] | 2.5 | | |
| Reference temperatu torque | re [°C] | 20 | | |
| Shaft design | | hollow shaft open to one side | | |
| Shaft diameter | [mm] | 12 | | |
| Shaft fit | | H7 | | |
| Shaft material | | stainless steel | | |
| Installation depth/sha | ft [mm] | 10 | | |
| Max. axial shaft misa | lignment [mm] | 1; (max. radial shaft alignment: ± 0,05 mm) | | |
| Electrical connectio | n | | | |
| Cable: 1 m, PUR; radial | | | | |
| brown green grey pink red black black blue blue brown/green brown/green white/green screen A inverted b inverted o index o index inverted blue 1030V sensor bv sensor bv (Up) white/green browning | | | | |
| Diagrams and graphs | | | | |
| Pulse diagram | | Direction of rotation clockwise (looking at the shaft) | | |