




## Incremental encoder with solid shaft

RU10000-I05/K

Article no longer available - archive entry

Alternative articles: RUP500

When selecting an alternative article and accessories please note that technical data may differ!

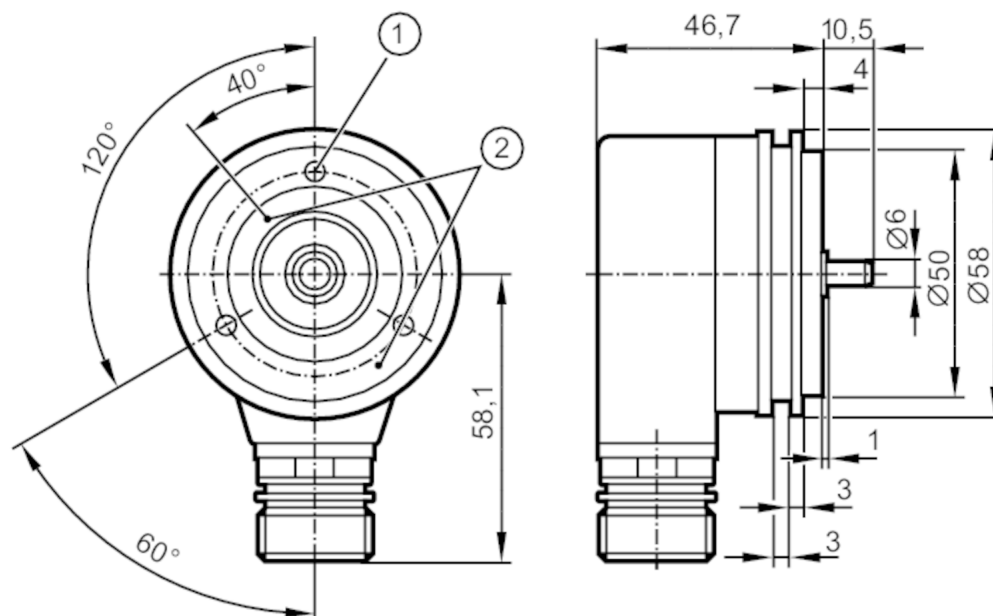

- 1 reference mark
- 2 M4 Depth 6 mm



### Product characteristics

Resolution	10000 resolution
Shaft design	solid shaft
Shaft diameter [mm]	6

### Application

Function principle	incremental
--------------------	-------------

### Electrical data

Operating voltage tolerance [%]	10
Operating voltage [V]	5 DC
Current consumption [mA]	150

### Outputs

Electrical design	TTL
Max. current load per output [mA]	20
Switching frequency [kHz]	300
Phase difference A und B [°]	90

### Measuring/setting range

Resolution	10000 resolution
------------	------------------

### Operating conditions

Ambient temperature [°C]	-30...100
--------------------------	-----------

# RU1125



## Incremental encoder with solid shaft

RU10000-I05/K

Storage temperature	[°C]	-30...100
Protection		IP 64

### Tests / approvals


Shock resistance		100 g (6 ms)
Vibration resistance		15 g (55...2000 Hz)

### Mechanical data

Weight	[g]	417.8
Dimensions	[mm]	Ø 58 / L = 46.7
Material		aluminum
Max. revolution, mechanical	[U/min]	12000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	6
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	10
Max. shaft load radial (at the shaft end)	[N]	20
Fixing flange		Synchro-flange

### Electrical connection

Connector: 1 x M23 (ifm 1001.4), radial



pink (1)	housing B inverted
blue (2)	L+ sensor
red (3)	0 index
black (4)	0 index inverted
brown (5)	A
green (6)	A inverted
lilac (7)	error inverted
grey (8)	B
Pin 9	n.c.
white/green (10)	0V
white (11)	0V sensor
brown/green (12)	L+
screen	housing

# RU1125




## Incremental encoder with solid shaft

RU10000-I05/K

### Diagrams and graphs

Pulse diagram



Direction of rotation clockwise (looking at the shaft)