

ST0511




Flow monitor

SCR14ABAFPKG/US-100-IPF

Article no longer available - archive entry

Alternative articles: SI5000 + E40099

When selecting an alternative article and accessories please note that technical data may differ!

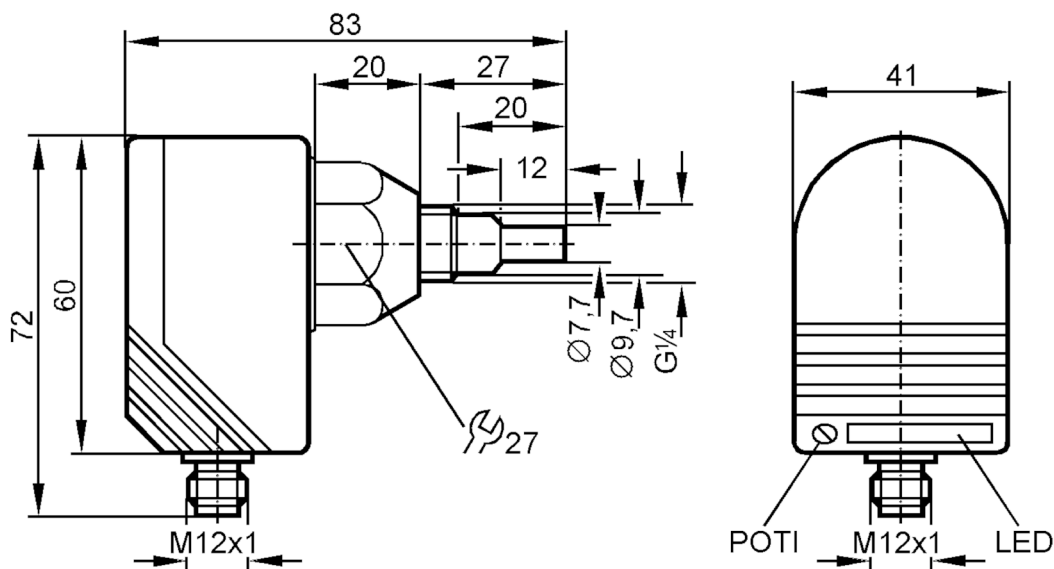

Product characteristics	
Number of inputs and outputs	Number of digital outputs: 1
Process connection	G 1/4 external thread
Application	
Media	Liquids
Medium temperature [°C]	-25...80
Pressure rating [bar]	30
Electrical data	
Operating voltage [V]	20...36 DC
Current consumption [mA]	< 45
Reverse polarity protection	yes
Power-on delay time [s]	< 20
Inputs / outputs	
Number of inputs and outputs	Number of digital outputs: 1
Outputs	
Total number of outputs	1
Output signal	switching signal
Electrical design	PNP
Number of digital outputs	1

ST0511



Flow monitor

SCR14ABAFPKG/US-100-IPF

Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	400	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	

Measuring/setting range

Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...60

Accuracy / deviations

Max. temperature gradient of medium [K/min]	30
---	----

Reaction times

Response time [s]	1...10
-------------------	--------

Software / programming

Adjustment of the switch point	potentiometer
--------------------------------	---------------

Operating conditions

Ambient temperature [°C]	-20...80
Protection	IP 67

Mechanical data

Material	PBT-GF20
Materials (wetted parts)	stainless steel (1.4305 / 303)
Process connection	G 1/4 external thread

Displays / operating elements

Display	Function	11 x LED
---------	----------	----------

Accessories

Items supplied	sealings: 2 x AMF 30 screwdrivers
----------------	--------------------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A



ST0511



Flow monitor

SCR14ABAFPKG/US-100-IPF

Connection

