


UGT207

Ultrasonic sensor

UG-02200E1KG/IO-LINK/US

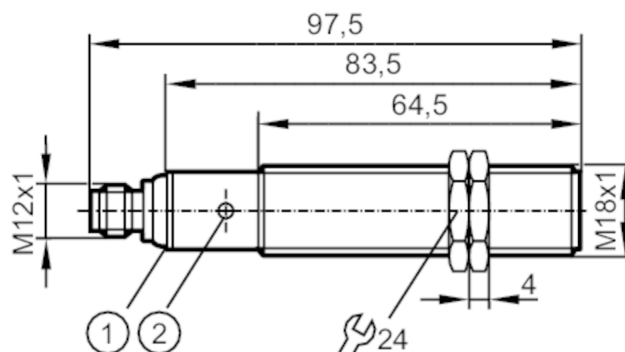

- 1 LEDs
- 2 teach button



Product characteristics

Electrical design	PNP
Output function	normally open / closed; (configurable)
Sensing range [mm]	200...2200; (Target: 200 x 200 mm)
Communication interface	IO-Link
Housing	Threaded type
Dimensions [mm]	M18 x 1 / L = 97.5

Electrical data

Operating voltage [V]	10...30 DC; (cULus - Class 2 source required)
Current consumption [mA]	55
Protection class	III
Reverse polarity protection	yes
Power-on delay time [s]	< 0.3
Converter frequency [kHz]	200

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1; Number of analog outputs: 1
------------------------------	---

Outputs

Total number of outputs	2
Output signal	switching signal; analog signal; IO-Link
Electrical design	PNP
Number of digital outputs	1
Output function	normally open / closed; (configurable)
Max. voltage drop switching output DC [V]	2.2
Permanent current rating of switching output DC [mA]	100
Switching frequency DC [Hz]	2
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	500
Short-circuit protection	yes



Ultrasonic sensor

UG-02200E1KG/IO-LINK/US

Overload protection	yes
Resolution of analog output	< 3 mm
Monitoring range	
Sensing range [mm]	200...2200; (Target: 200 x 200 mm)
Blind zone [mm]	200
Angle of aperture cylindrical [°]	14; (±2)
Max. deviation from the 90° angle sensor/object [°]	± 4
Accuracy / deviations	
Temperature compensation	yes
Hysteresis [%]	< 2
Switch-point drift [%]	-2...2
Linearity error of analog output [%]	<3
Repeatability	1 %
Notes on the accuracy / deviation	The indicated values are reached after a warm-up time of min. 20 minutes
Reaction times	
Response time [ms]	< 300; (analog output)
Software / programming	
Parameter setting options	hysteresis / window; second switch point; Switch-on and switch-off delay; switch-on operations; Teach function; light-on/dark-on mode
Interfaces	
Communication interface	IO-Link
Transmission type	COM2 (38,4 kBaud)
IO-Link revision	1.1
SDCI standard	IEC 61131-9
Profiles	Smart Sensor: Device Identification; Multi-channel, two setpoint switching sensor, type 0 Generic Profiled Sensor; Process Data Variable; Device Diagnosis; Teach Channel
SIO mode	yes
Required master port class	A
Min. process cycle time [ms]	3.2
IO-Link process data (cyclical)	Function
	bit length
	process value 16
	device status 4
IO-Link functions (acyclical)	binary switching information 2
	application specific tag; operating hours counter
Supported DeviceIDs	Type of operation
	DeviceID
Note	default 704
	For further information please see the IODD PDF file at "Downloads"
Operating conditions	
Ambient temperature [°C]	-20...70
Storage temperature [°C]	-30...80
Protection	IP 67



Ultrasonic sensor

UG-02200E1KG/IO-LINK/US

Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	3 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	3 V
	EN 55011	class A
Vibration resistance	EN 60068-2-6 Fc	(10-55) Hz 1 mm amplitude, vibration duration 5 min., 30 min. per axis with resonance or 55 Hz
Shock resistance	EN 60068-2-27 Ea	30 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
MTTF [years]		142
UL approval	Ta	-20...70 °C
	voltage supply	Class 2
	File number UL	E174191

Mechanical data		
Weight [g]		98.3
Housing		Threaded type
Dimensions [mm]		M18 x 1 / L = 97.5
Thread designation		M18 x 1
Material		PBT; PA; epoxy glass ceramics
Tightening torque [Nm]		1

Displays / operating elements		
Display	Switching status	2 x LED, yellow
	echo	1 x LED, green
Teach function		yes

Accessories		
Items supplied		lock nuts: 2, plastics
		rubber washers: 2

Remarks		
Remarks		cULus - Class 2 source required
Pack quantity		1 pcs.

Electrical connection


Connector: 1 x M12; coding: A



Ultrasonic sensor

UG-02200E1KG/IO-LINK/US



Connection

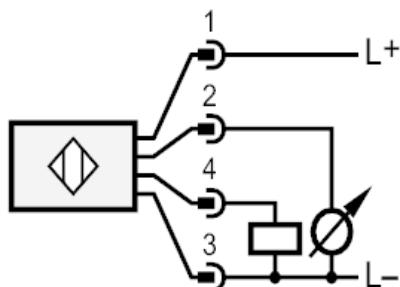

Pin 4 = IO-Link



Diagrams and graphs

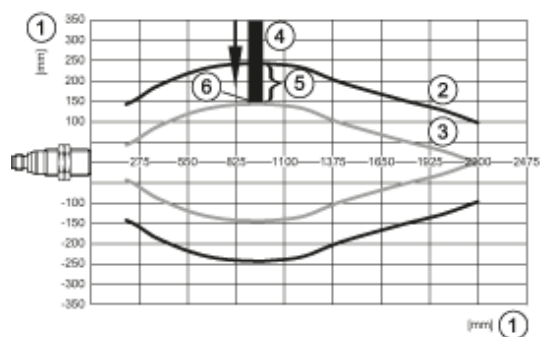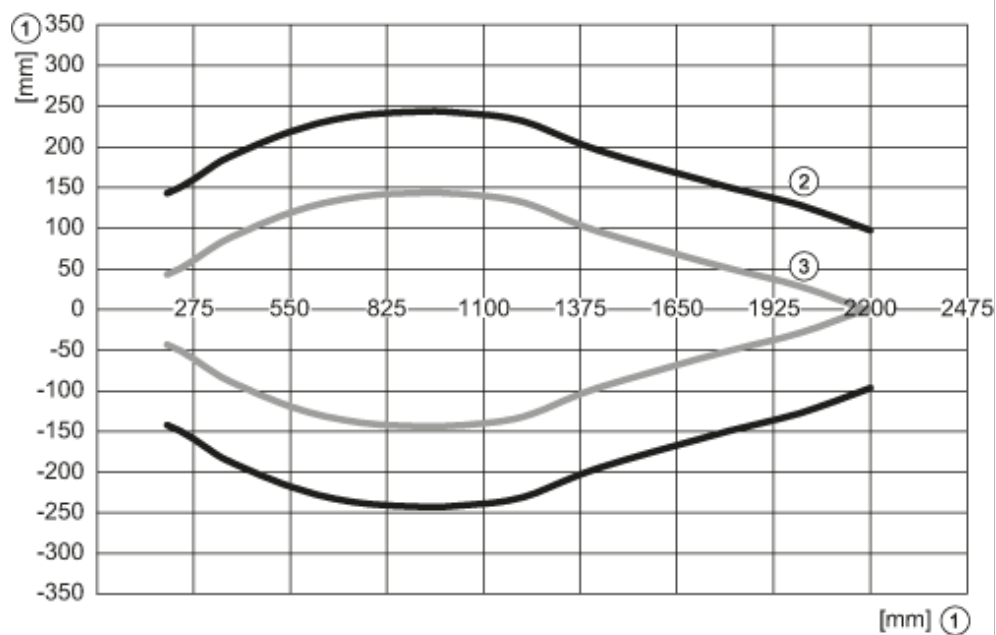

- 1: Distance
- 2: Monitoring range
- 3: switch-on/switch-off graph
- 4: Target 200 x 200 mm
- 5: 50 % of the target in the detection zone
- 6: Set point