
# **UI0051**

### **Inductive NAMUR sensor**

KIT, NG501A, E12342, ENC05A






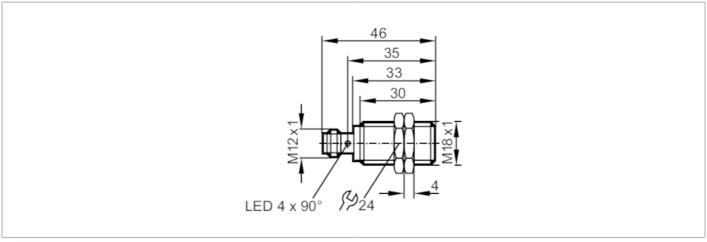

Product characteristics				
Electrical design		NAMUR		
Output function		normally closed		
Sensing range [mm]		8		
Housing		Threaded type		
Dimensions	[mm]	M18 x 1 / L = 46		
Electrical data				
Connection at circuit ampli	ifier	yes		
Switching amplifiers		connection to certified intrinsically safe circuits with the max. values: $U = 15 \text{ V} / I = 50 \text{ mA} / P = 120 \text{ mW}$		
Nominal voltage DC	[V]	8.2; (1kΩ)		
Supply voltage DC	[V]	7.530; (when used outside the hazardous area)		
Current consumption	[mA]	< 1; (disabled; conductive: > 2,1)		
Protection class		II		
Outputs				
Electrical design		NAMUR		
Output function		normally closed		
Permanent current rating of switching output DC	of [mA]	30; (when used outside the hazardous area)		
Switching frequency DC	[Hz]	400		
Monitoring range				
Sensing range	[mm]	8		
Real sensing range Sr	[mm]	8 ± 10 %		
Operating distance	[mm]	06.48		
Accuracy / deviations				
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.5 / aluminum: 0.4 / copper: 0.3		
Hysteresis	[% of Sr]	115		
Switch-point drift	[% of Sr]	-1010		
Operating conditions				
Ambient temperature	[°C]	-2070		

# UI0051

### **Inductive NAMUR sensor**





Protection		IP 67				
Tests / approvals						
Approval		BVS 04 ATEX E 091 X; IECEx BVS 06.0003				
ATEX marking		⟨Ex⟩ II 1G Ex ia IIC T6 Ga				
		⟨Ex⟩ II 1D Ex ia IIIC T 90°C Da				
EMC		EN 60947-5-6				
Shock/vibration resistance		30 g (11 ms) / 10-55 Hz (1 mm)				
Safety classification						
Max. internal capacitance	[nF]	200				
Max. internal inductance	[µH]	190				
Mechanical data						
Weight	[g]	151.046				
Housing		Threaded type				
Mounting		flush mountable				
Dimensions	[mm]	M18 x 1 / L = 46				
Thread designation		M18 x 1				
Material		brass special coating; sensing face: PBT; LED window: PA				
Displays / operating eleme	nts					
Display		Switching status		4 x 90° LED, yellow		
Accessories						
Items supplied		lock nuts: 2				
		All female cordsets: 1, ENC05A				
Remarks						
Pack quantity		1 pcs.				
Electrical connection - plug						

Connector: 1 x M12; coding: A



# **UI0051**

### **Inductive NAMUR sensor**

KIT, NG501A, E12342, ENC05A



### Connection

