


Inductive sensor

IA-2010-ABOW/Sonderkabel

Article no longer available - archive entry

Alternative articles: IA0004

When selecting an alternative article and accessories please note that technical data may differ!

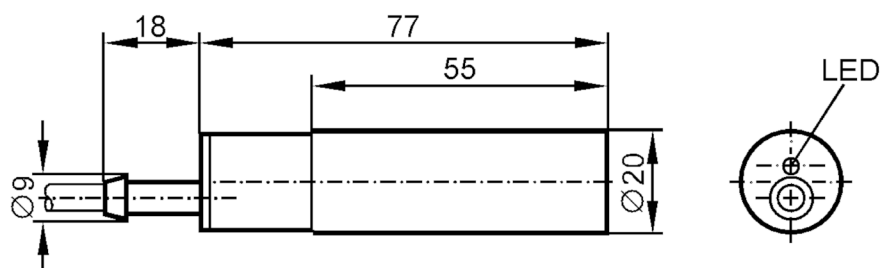

Product characteristics

Output function		normally open
Sensing range	[mm]	10
Housing		cylindrical
Dimensions	[mm]	Ø 20

Electrical data

Frequency AC	[Hz]	47...63
Operating voltage	[V]	20...250 AC
Protection class		II
Reverse polarity protection		no

Outputs


Output function		normally open
Max. voltage drop switching output AC	[V]	5.5
Minimum load current	[mA]	5
Max. leakage current	[mA]	2.5
Permanent current rating of switching output AC	[mA]	300; (500 (...50 °C))
Short-time current rating of switching output	[mA]	2200; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	20
Short-circuit protection		no
Overload protection		no



Inductive sensor

IA-2010-ABOW/Sonderkabel

Detection zone		
Sensing range	[mm]	10
Real sensing range Sr	[mm]	$10 \pm 10 \%$
Operating distance	[mm]	0...8.1
Accuracy / deviations		
Correction factor		steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Mechanical data		
Housing		cylindrical
Mounting		non-flush mountable
Dimensions	[mm]	Ø 20
Materials		PBT
Displays / operating elements		
Display	switching status	1 x LED, yellow
Accessories		
Items supplied		Mounting clamps: 1
Remarks		
Pack quantity		1 pcs.
Electrical connection		
Cable: 2 m; 2 x 0.75 mm ²		
Connection		

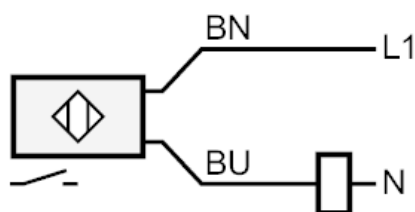

BN = Core colours :
brown
BU = blue