




Inductive sensor

IOW2010-BRKG/UP/0.80M/PUR/US

Article no longer available - archive entry

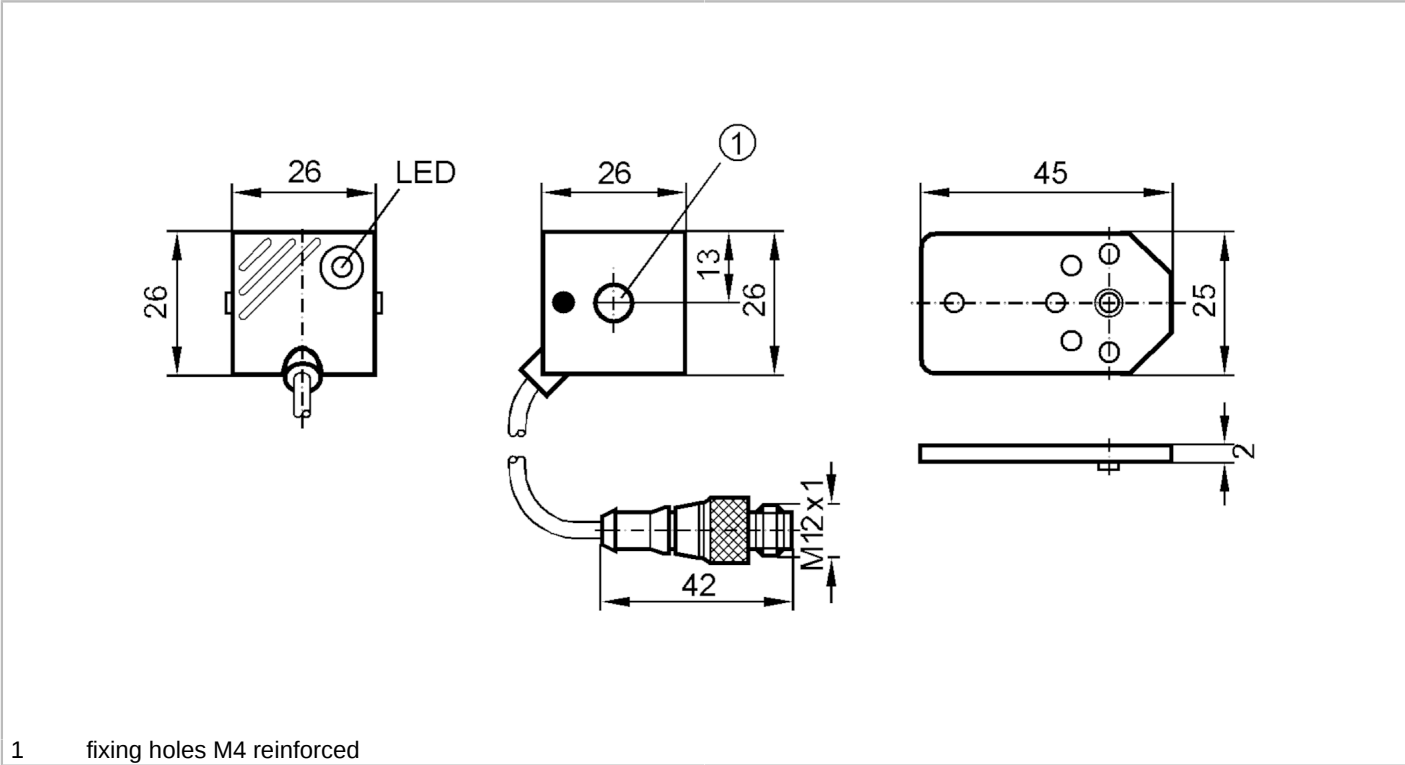

Product characteristics		
Electrical design		PNP/NPN
Output function		normally closed
Sensing range	[mm]	10
Housing		rectangular
Dimensions	[mm]	26 x 26 x 26
Electrical data		
Operating voltage	[V]	10...55 DC
Protection class		II
Reverse polarity protection		yes
Outputs		
Electrical design		PNP/NPN
Output function		normally closed
Max. voltage drop switching output DC	[V]	4.5
Minimum load current	[mA]	4
Max. leakage current	[mA]	0.6
Permanent current rating of switching output DC	[mA]	100
Switching frequency DC	[Hz]	250
Short-circuit protection		yes



Inductive sensor

IOW2010-BRKG/UP/0.80M/PUR/US

Type of short-circuit protection	pulsed
Overload protection	yes

Detection zone

Sensing range [mm]	10
Real sensing range S_r [mm]	$10 \pm 10 \%$
Operating distance [mm]	0...8.1

Accuracy / deviations

Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2
Hysteresis [% of S_r]	1...15
Switch point drift [% of S_r]	-10...10

Operating conditions

Ambient temperature [°C]	-25...70
Protection	IP 67

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data

Housing	rectangular
Mounting	flush mountable
Dimensions [mm]	26 x 26 x 26
Materials	PBT

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection - plug

Cable: 0.8 m, PUR

Connector: 1 x M12; coding: A





Inductive sensor

IO9208-01-BRKG/UP/0.80M/PUR/US

Connection

