


OBF508



Fibre-optic amplifier

OBF-FAKG/T/AS

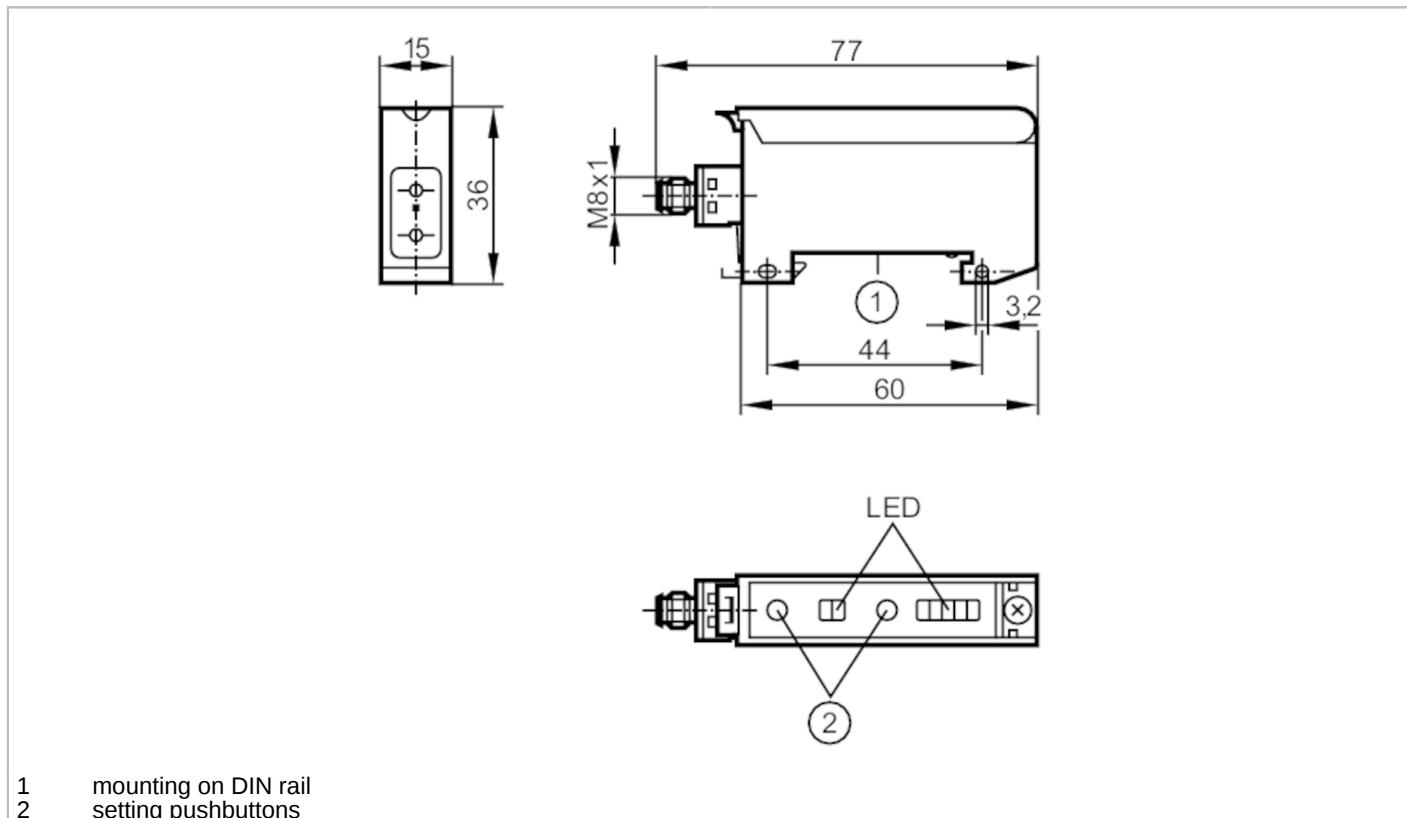

- 1 mounting on DIN rail
2 setting pushbuttons



Product characteristics

Type of light	red light
---------------	-----------

Housing	rectangular
---------	-------------

Application

Design	Fibre-optic amplifiers for glass fibre optics, for fibre optics with metal sheath, FE/FT-50
--------	---

Electrical data

Operating voltage [V]	10...30 DC
-----------------------	------------

Current consumption [mA]	< 50
--------------------------	------

Protection class	III
------------------	-----

Reverse polarity protection	yes
-----------------------------	-----

Type of light	red light
---------------	-----------

Outputs

Electrical design	PNP/NPN; (automatic load detection PNP/NPN)
-------------------	---

Output function	light-on/dark-on mode; (programmable)
-----------------	---------------------------------------

Max. voltage drop switching output DC [V]	2.5
---	-----

Permanent current rating of switching output DC [mA]	100
--	-----

Switching frequency DC [Hz]	1000
-----------------------------	------

Short-circuit protection	yes
--------------------------	-----

Type of short-circuit protection	pulsed
----------------------------------	--------

OBF508



Fibre-optic amplifier

OBF-FAKG/T/AS

Overload protection		yes
Time function	[s]	0.001...0.09
Detection zone		
Range	[m]	0...1; (Through-beam sensor)
Range	[mm]	0...150; (Diffuse reflection sensor)
Factory setting		dark-on mode
Range adjustable		yes
Operating conditions		
Ambient temperature	[°C]	-25...60
Protection		IP 65
Tests / approvals		
EMC		EN 60947-5-2
MTTF	[years]	837
Mechanical data		
Weight	[g]	47.8
Housing		rectangular
Dimensions	[mm]	36 x 15 x 60
Materials		PPE modified
Lens alignment		side lens
Displays / operating elements		
Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	unsafe zone	1 x LED, red
	excess gain	4 x LED, green
Remarks		
Remarks	light-on mode corresponds to the NC output function for through-beam fibre optics corresponds to the NO output function for diffuse-reflection fibre optics dark-on mode corresponds to the NO output function for through-beam fibre optics corresponds to the NC output function for diffuse-reflection fibre optics	
Pack quantity	1 pcs.	

Fibre-optic amplifier

OBF-FAKG/T/AS

Electrical connection

Connector: 1 x M8; coding: A

