




Through-beam sensor receiver

OGE-FPKG/V4A/US-100

Article no longer available - archive entry

Alternative articles: OGE300 or OGE301

When selecting an alternative article and accessories please note that technical data may differ!

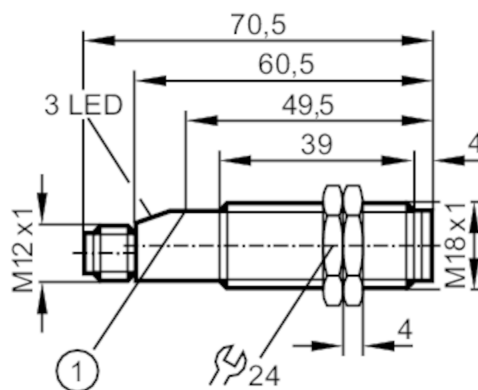

1 pushbutton

Product characteristics

Type of light	infrared light
Housing	threaded type

Application

Special feature	Gold-plated contacts; Function check output
Function principle	Through-beam sensor

Electrical data

Operating voltage	[V]	10...36 DC
Current consumption	[mA]	< 24
Protection class		II
Reverse polarity protection		yes
Type of light		infrared light
Wave length	[nm]	880

Outputs

Electrical design		PNP
Output function		light-on/dark-on mode; (parameterisable)
Max. voltage drop switching output DC	[V]	2.5
Function check output		yes
Max. voltage drop of function check output	[V]	3.5
Max. current load for function check output	[mA]	10
Permanent current rating of switching output DC	[mA]	200
Switching frequency DC	[Hz]	500
Short-circuit protection		yes
Type of short-circuit protection		pulsed



Through-beam sensor receiver

OGE-FPKG/V4A/US-100

Overload protection	yes
---------------------	-----

Detection zone	
----------------	--

Transmitter / receiver	receiver
Range [m]	< 15
Range adjustable	yes

Operating conditions	
----------------------	--

Ambient temperature [°C]	-25...80
Protection	IP 68; IP 69K

Tests / approvals		
-------------------	--	--

EMC	EN 60947-5-2	
	EN 55011	class B

Mechanical data	
-----------------	--

Housing	threaded type
Dimensions [mm]	M18 x 1 / L = 70.5
Thread designation	M18 x 1
Materials	stainless steel (316L/1.4404); PBT
Lens material	PMMA

Displays / operating elements		
-------------------------------	--	--

Display	switching status	1 x LED, yellow
	operation	1 x LED, green
	function	1 x LED, red

Accessories	
-------------	--

Items supplied	lock nuts: 2
----------------	--------------

Remarks	
---------	--

Pack quantity	1 pcs.
---------------	--------

Electrical connection	
-----------------------	--


Connector: 1 x M12; coding: A; Contacts: gold-plated



Through-beam sensor receiver

OGE-FPKG/V4A/US-100

Connection

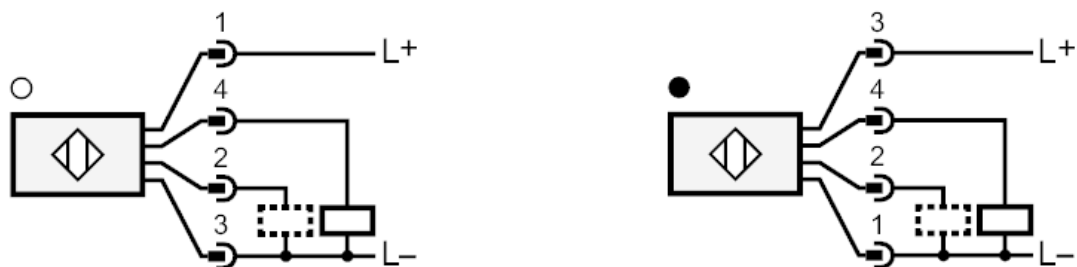

2 Function check output

Diagrams and graphs

excess gain graph

