

Inductive sensor

IGA2008-ABOA/V4A/6M/CSA

Article no longer available - archive entry



Product characteristics

Output function		normally open
Sensing range [mm]		8
Housing		threaded type
Dimensions [mm]		M18 x 1 / L = 80

Electrical data

Operating voltage [V]		20...250 AC/DC
Protection class		II
Reverse polarity protection		no

Outputs

Output function		normally open
Max. voltage drop switching output DC [V]		6
Max. voltage drop switching output AC [V]		6.5
Minimum load current [mA]		5
Max. leakage current [mA]		2.5 (250 V AC) / 1.3 (110 V AC) / 0.8 (24 V DC)
Permanent current rating of switching output AC [mA]		250; (350 (...50 °C))
Permanent current rating of switching output DC [mA]		100
Short-time current rating of switching output [mA]		2200; (20 ms / 0,5 Hz)
Switching frequency AC [Hz]		25
Switching frequency DC [Hz]		50
Short-circuit proof		no
Overload protection		no

Detection zone


Sensing range [mm]		8
Real sensing range Sr [mm]		8 ± 10 %
Operating distance [mm]		0...6.5



Inductive sensor

IGA2008-ABOA/V4A/6M/CSA

Accuracy / deviations		
Correction factor	steel: 1 / stainless steel: 0.7 / brass: 0.4 / aluminium: 0.3 / copper: 0.2	
Hysteresis	[% of Sr]	1...15
Switch point drift	[% of Sr]	-10...10
Operating conditions		
Ambient temperature	[°C]	-25...80
Protection	IP 67	
Tests / approvals		
EMC	EN 60947-5-2	
	EN 55011	class B
MTTF	[years]	604
Mechanical data		
Housing	threaded type	
Mounting	non-flush mountable	
Dimensions	[mm]	M18 x 1 / L = 80
Thread designation	M18 x 1	
Materials	stainless steel (316Ti/1.4571); PBT uncoloured	
Displays / operating elements		
Display	switching status	1 x LED, yellow
Electrical connection		
Required protection	miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting	
Accessories		
Items supplied	lock nuts: 2	
Remarks		
Remarks	Recommendation: Check the safe functioning of the unit after a short circuit.	
Pack quantity	1 pcs.	
Electrical connection		
Cable: 6 m, PVC; 2 x 0.5 mm²		
Connection		

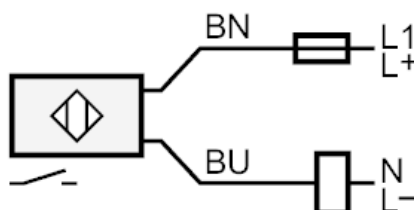

Note miniature fuse to IEC60127-2 sheet 1 ≤ 2 A fast acting