



Through-beam sensor receiver

OGE-HBOW/LS/CUBE

Article no longer available - archive entry



Product characteristics

Type of light	red light
Housing	rectangular with M18 thread

Application

Function principle	Through-beam sensor
--------------------	---------------------

Electrical data

Frequency AC	[Hz]	47...63
Operating voltage	[V]	20...250 AC
Protection class		II; (double insulated)
Type of light		red light
Wave length	[nm]	633

Outputs

Output function		light-on mode
Max. voltage drop switching output AC	[V]	8
Minimum load current	[mA]	5
Max. leakage current	[mA]	1.7
Permanent current rating of switching output AC	[mA]	150; (200 (...40 °C))
Short-time current rating of switching output	[mA]	1200; (20 ms / 0,5 Hz)
Switching frequency AC	[Hz]	30
Short-circuit protection		no
Overload protection		no

Detection zone

Transmitter / receiver		receiver
Range	[m]	< 20



Through-beam sensor receiver

OGE-HBOW/LS/CUBE

Range adjustable	no
------------------	----

Operating conditions

Ambient temperature	[°C]	-25...60
---------------------	------	----------

Protection	IP 67
------------	-------

Tests / approvals

EMC	EN 60947-5-2	
	EN 55011 emission	class B

Mechanical data

Weight	[g]	60.5
--------	-----	------

Housing	rectangular with M18 thread
---------	-----------------------------

Dimensions	[mm]	52.6 x 19.1 x 36.9
------------	------	--------------------

Thread designation	M18 x 1
--------------------	---------

Materials	diecast zinc; PEI
-----------	-------------------

Lens material	PMMA
---------------	------

Lens alignment	side lens
----------------	-----------

Displays / operating elements

Display	switching status	1 x LED, yellow
---------	------------------	-----------------

Electrical connection

Required protection	miniature fuse to IEC60127-2 sheet 1; ≤ 2 A; fast acting
---------------------	--

Accessories

Items supplied	lock nut: 1
----------------	-------------

Remarks

Remarks	Do not connect without a load.
---------	--------------------------------

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x 1/2"; coding: C



Through-beam sensor receiver

OGE-HBOW/LS/CUBE


Connection



Note : miniature fuse to IEC60127-2 sheet 1 ≤ 2 A fast acting

Diagrams and graphs

excess gain graph

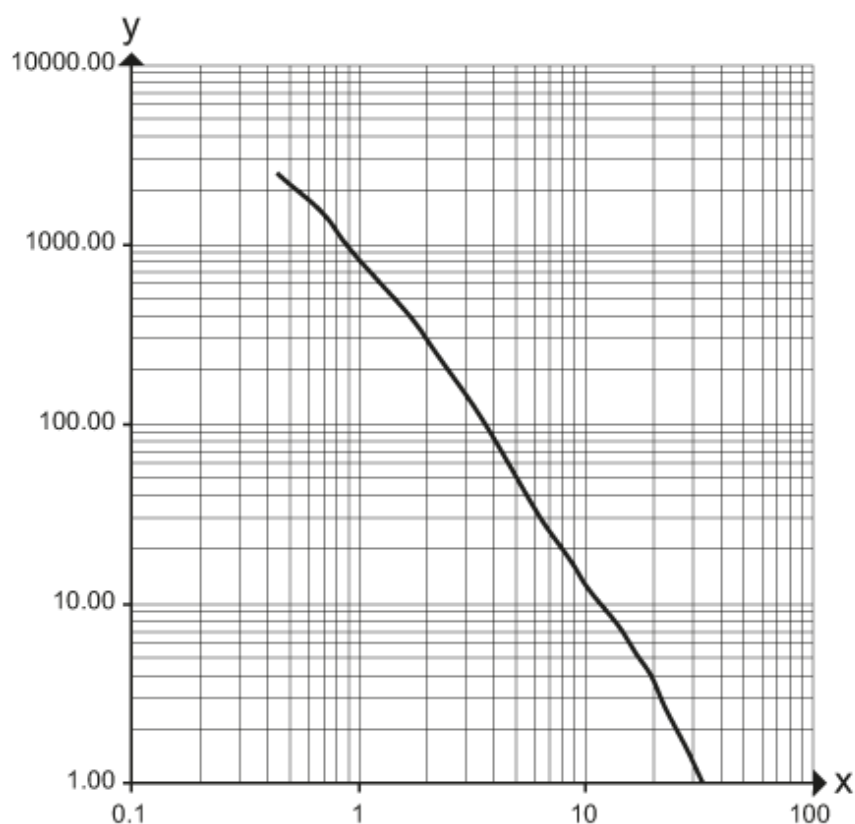

x: Abstand [m]

y: Funktionsreservefaktor