


E10378



Connecting cable with socket

ADOGH040MSN0020A04

Article no longer available - archive entry

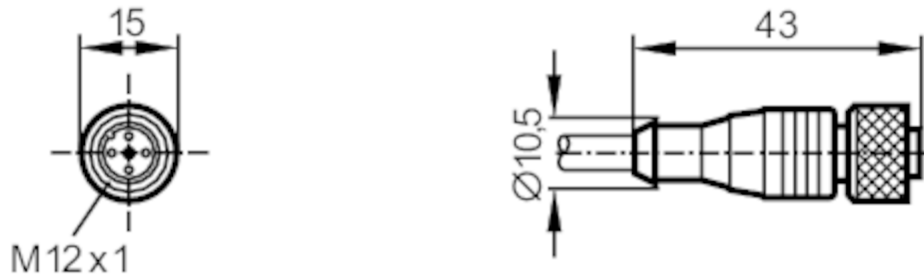

Application	
Application	Ex zone 1
Electrical data	
Operating voltage [V]	< 15 DC
Operating conditions	
Ambient temperature [°C]	-25...90
Protection	IP 67
Safety classification	
Max. internal capacitance [nF]	0.196
Max. internal inductance [μH]	4
Mechanical data	
Dimensions [mm]	15 x 15 x 43
Materials	TPU blue
Moulded-body material	TPU, blue
Material nut	brass, nickel-plated
Remarks	
Remarks	When using sockets in hazardous areas (ATEX) there are special requirements regarding wiring. The requirements of the applicable installation regulations must be absolutely adhered to by the user on his own responsibility.
Pack quantity	1 pcs.

E10378



Connecting cable with socket


ADOGH040MSN0020A04

Electrical connection


Cable: 20 m, PUR / PVC, blue, Ø 5 mm; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - socket

Connector: 1 x M12, straight; Moulded body: TPU, blue; Locking: brass, nickel-plated; Tightening torque: 0.5 Nm



Connection

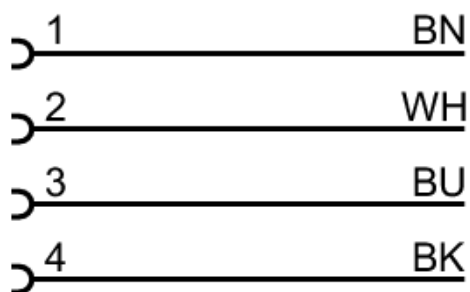

Core colours :

BK =	black
BN =	brown
BU =	blue
WH =	white