


# RM9000



## Absolute multiturn encoder with solid shaft

RMS0024-C24/US

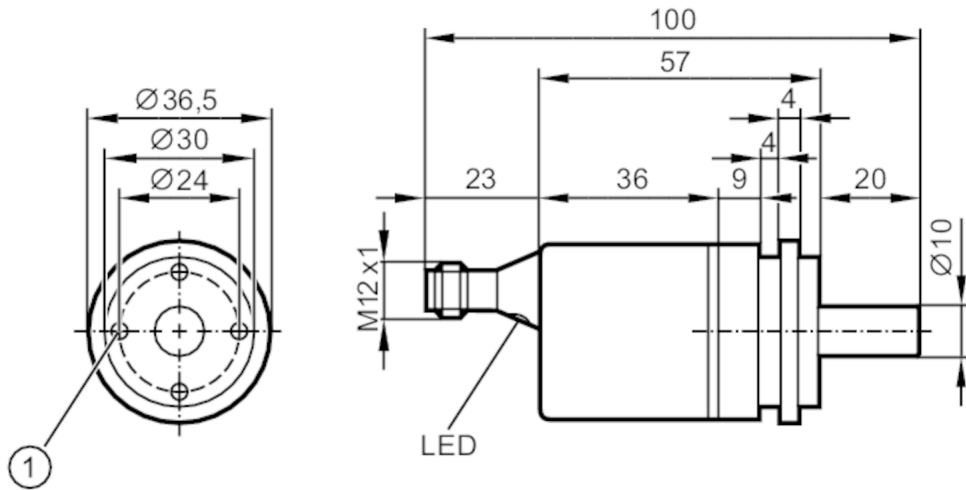

1 M4 Depth 6 mm



### Product characteristics

Resolution	4096 steps; 4096 revolutions; 24 bit
Communication interface	CAN
Shaft design	solid shaft
Shaft diameter [mm]	10

### Application

Function principle	absolute
Revolution type	multiturn

### Electrical data

Operating voltage [V]	9...30 DC; ("supply class 2" to cULus)
Current consumption [mA]	< 100; ((10 V DC) ; ≤ 50 (24 V DC))
Protection class	III
Reverse polarity protection	yes

### Outputs

Short-circuit protection	yes
Code	binary

### Measuring/setting range

Resolution	4096 steps; 4096 revolutions; 24 bit
------------	--------------------------------------

### Accuracy / deviations

Accuracy [°]	0.08
--------------	------

### Software / programming

Parameter setting options	CAN parameter; scaling; preset; Baud rate; direction of rotation; Node ID
---------------------------	---

### Interfaces

Communication interface	CAN
-------------------------	-----

# RM9000



## Absolute multiturn encoder with solid shaft

RMS0024-C24/US

CAN		
Protocol	CANopen	
Factory settings	Baud rate: 125 k node ID: 32	
Version	DSP - 406 V3.1; DS 301 V4.02; DS 306 V2.0	
Operating conditions		
Ambient temperature	[°C]	-40...85
Protection		IP 68; IP 69K
Tests / approvals		
Shock resistance		200 g (11 ms)
Vibration resistance		30 g (10...1000 Hz)
MTTF	[years]	240
Mechanical data		
Weight	[g]	234
Dimensions	[mm]	Ø 36.5 / L = 100
Materials		flange: aluminium; housing cap: steel scratch-resistant cathodic dip coating
Max. revolution, mechanical	[U/min]	6000
Max. starting torque	[Nm]	5
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	10
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	180
Max. shaft load radial (at the shaft end)	[N]	180
Fixing flange		synchro-flange
Displays / operating elements		
Display	Preoperational mode	LED, green
	Operational mode	LED, green flashing
	error message	LED, red flashing
Electrical connection		
1	CAN_GND	
2	VBBc	
3	GND (PE)	
4	CAN_High	
5	CAN_Low	
Connector: 1 x M12, axial		

# RM9000

## Absolute multiturn encoder with solid shaft

RMS0024-C24/US

