


Through-beam sensor transmitter

O6S-00KG/5M



1: light emission

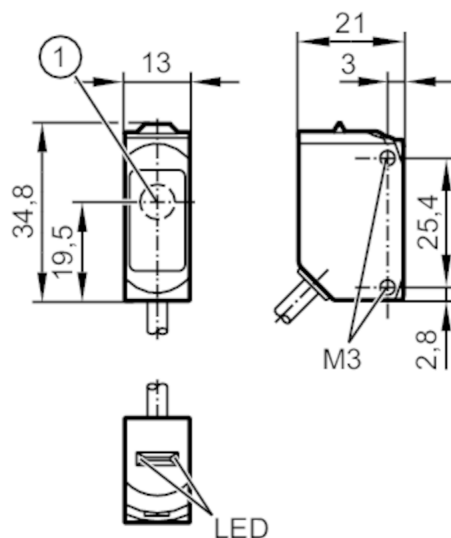

Product characteristics

Type of light	red light
Housing	rectangular

Application

Function principle	Through-beam sensor
Application	suited for use in the machine tool industry

Electrical data

Operating voltage	[V]	10...30 DC
Current consumption	[mA]	11; ((24 V))
Protection class		III
Type of light		red light
Wave length	[nm]	633

Detection zone

Transmitter / receiver	transmitter
Range [m]	< 10
Max. light spot diameter [mm]	300
Light spot dimensions refer to	at maximum range

Operating conditions

Ambient temperature	[°C]	-25...60
Protection		IP 65; IP 67; IP 68

Tests / approvals


EMC	EN 60947-5-2	
MTTF	[ANN]	2942
UL approval	UL Approval no.	E019

O6S401



Through-beam sensor transmitter

O6S-00KG/5M

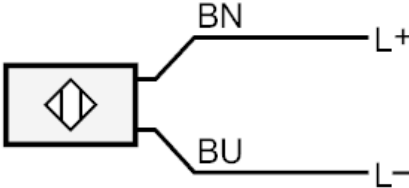Mechanical data		
Weight	[g]	128.2
Housing		rectangular
Dimensions	[mm]	34.8 x 13 x 21
Materials		housing: stainless steel (1.4404 / 316L); plastics: PPSU; Sealing: FKM
Lens material		PMMA
Lens alignment		side lens
Tightening torque	[Nm]	1; (screws)
Displays / operating elements		
Display	operation	1 x LED, green
Remarks		
Remarks		operating voltage "supply class 2" according to cULus
Pack quantity		1 pcs.
Electrical connection		
Cable: 5 m, PUR; 2 x 0.25 mm²		
Connection		
<div></div>		
BN =	Core colours :	
BU =		
	brown	
	blue	




Through-beam sensor transmitter

O6S-00KG/5M

Diagrams and graphs

excess gain graph

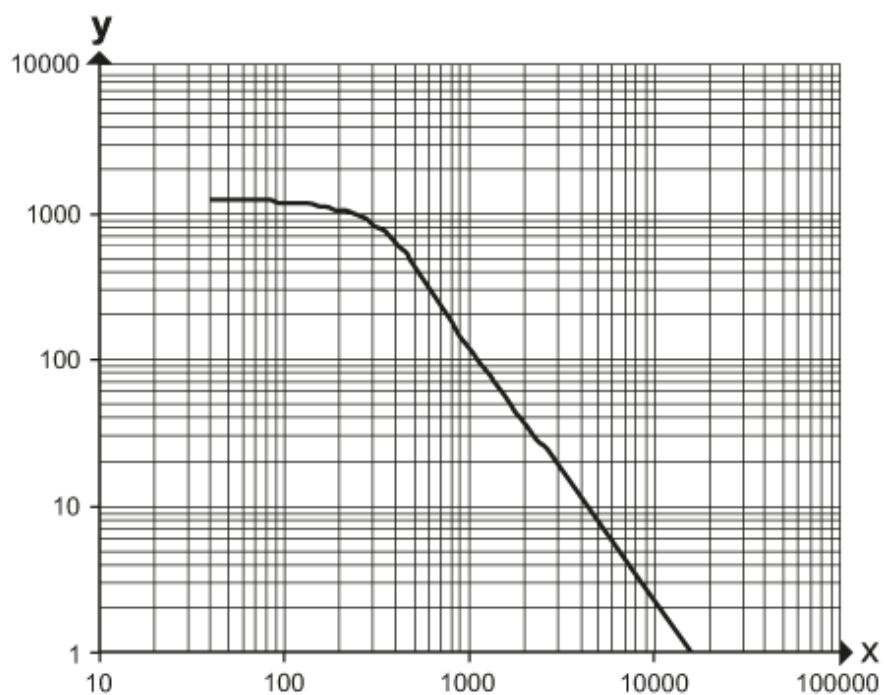

x: distance [mm]

y: excess gain factor