




Flow transmitter with integrated backflow prevention

SBY34HF010KG/US

Please note the changed housing design!

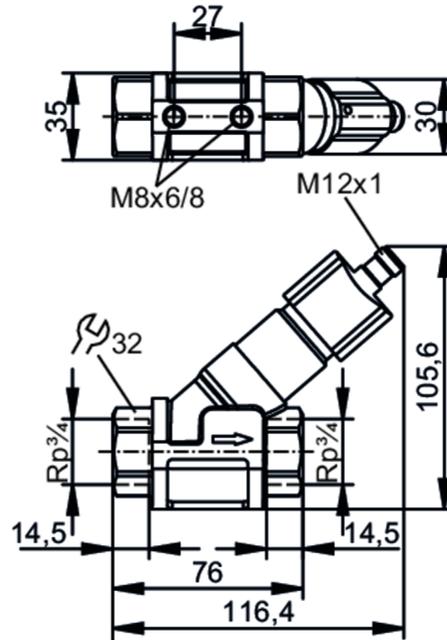

Product characteristics

Measuring range	[l/min]	1...25
Process connection		Rp 3/4

Application

Media	Liquids; water; glycol solutions; coolants	
Medium temperature	[°C]	-10...100
Pressure rating	[bar]	40
Pressure rating	[MPa]	4

Electrical data

Operating voltage	[V]	18...32 DC; (to SELV/PELV)
Current consumption	[mA]	< 35
Protection class		III
Reverse polarity protection		yes

Outputs

Output signal		analogue signal
Analogue current output	[mA]	4...20
Max. load	[Ω]	500
Short-circuit protection		yes
Overload protection		yes

Measuring/setting range

Measuring range	[l/min]	1...25
-----------------	---------	--------

SBY433



Flow transmitter with integrated backflow prevention

SBY34HF010KG/US

Accuracy / deviations		
Repeatability	[X16]	1
Measuring error	[X16]	± 5
Response times		
Response time	[s]	< 0.01
Operating conditions		
Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-15...80
Protection		IP 65; IP 67
Tests / approvals		
EMC	DIN EN 61000-6-2	
	DIN EN 61000-6-3	
Shock resistance	DIN EN 60068-2-27	20 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	5 g (10...2000 Hz)
MTTF	[ANN]	778
Mechanical data		
Weight	[g]	556.65
Materials		brass chemically nickel-plated; PP; stainless steel (1.4404 / 316L); aluminium anodised; PA
Materials (wetted parts)		stainless steel (316 / 1.4401); brass; brass chemically nickel-plated; PP; PPS; O-ring: FKM
Process connection		Rp 3/4
Switching cycles mechanical		10 million
Remarks		
Remarks		Recommendation Use 200 micron filtration All data refer to water (20 °C).
Notes		Please note the changed housing design!
Pack quantity		1 pcs.

Electrical connection

Connector: 1 x M12; coding: A




SBY433



Flow transmitter with integrated backflow prevention

SBY34HF010KG/US

Connection

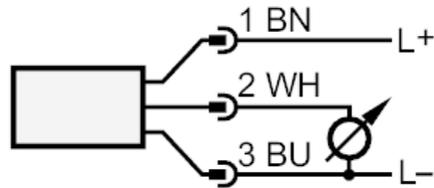


colours to DIN EN 60947-5-2

Core colours :

BN = brown
BU = blue
WH = white

Diagrams and graphs

Pressure loss

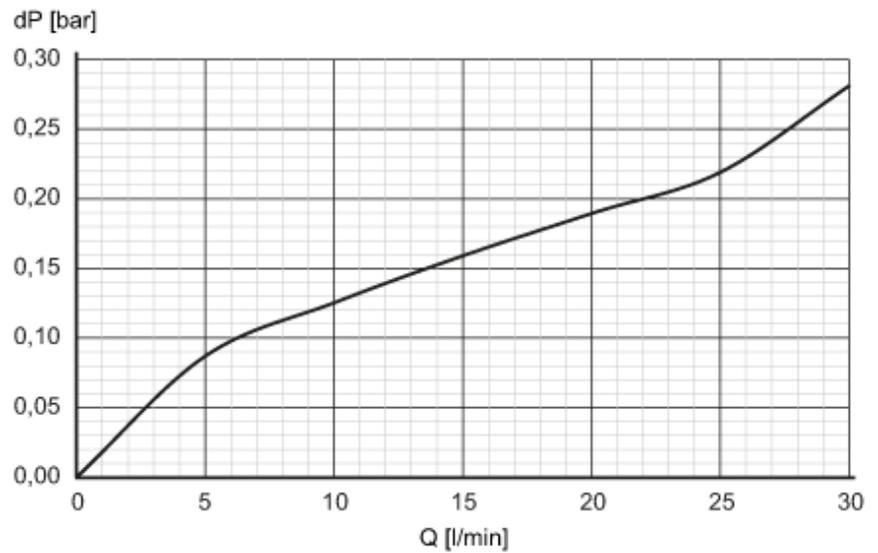

dP Pressure loss

Q volumetric flow quantity