


AC1303



AS-Interface PLC

ControllerE 1Mstr 1RS232C

Article no longer available - archive entry

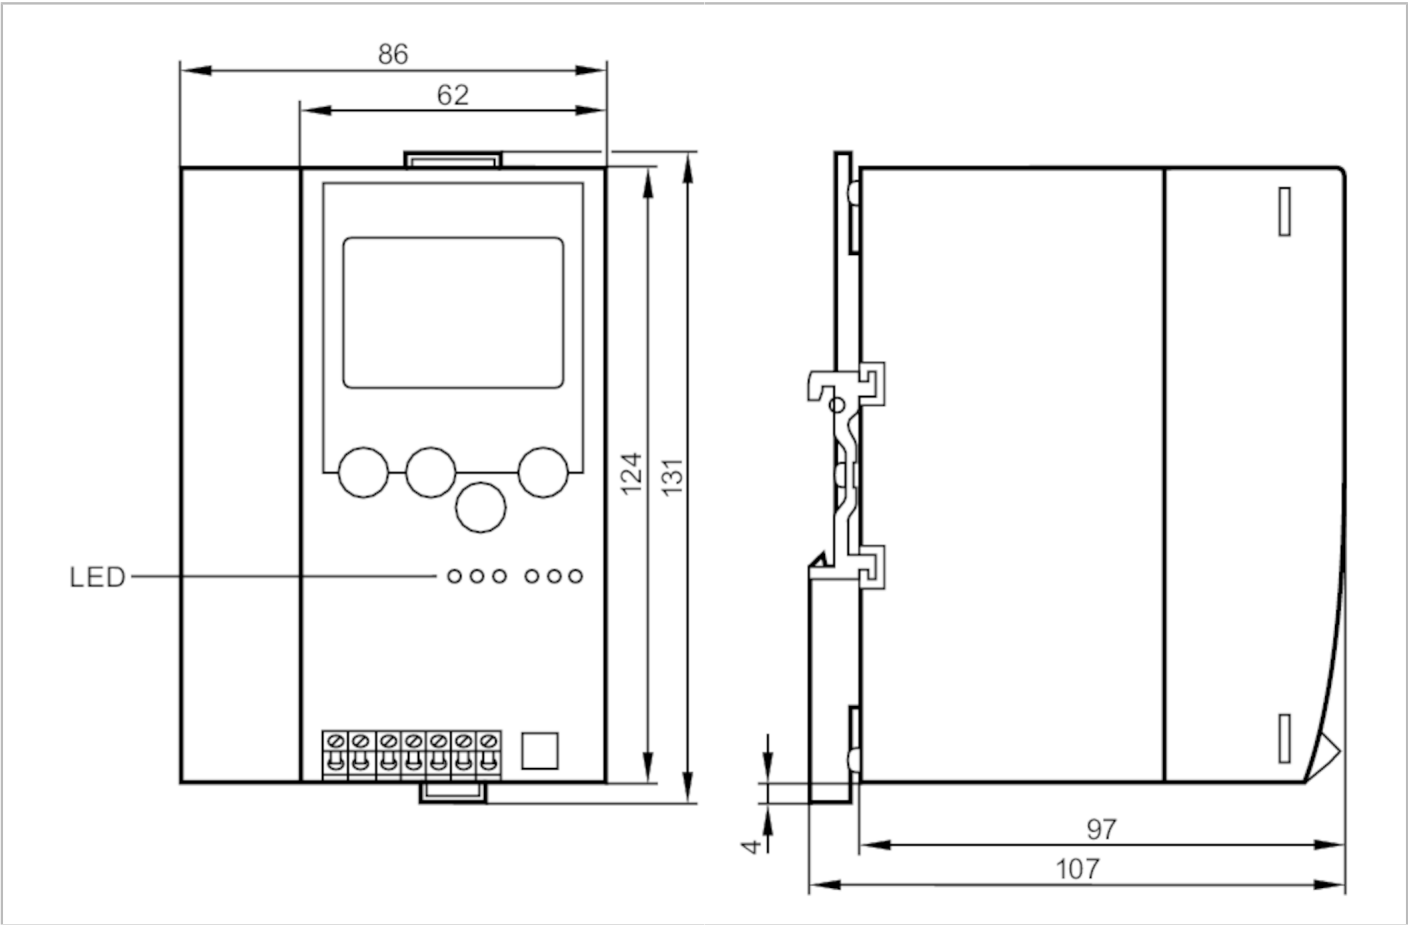

Application		
Application	decentralized controller	
Electrical data		
Operating voltage	[V]	24 DC; (cULus - Class 2 source required)
Insulation rating	[V]	500
Current consumption	[mA]	< 500
Max. current consumption from AS-i	[mA]	10
Max. power consumption	[VA]	10
Number of AS-i masters		1
Electrical separation		yes
Interfaces		
Communication interface	RS232	
RS232		
Number of R232 interfaces	1	
Transmission rate	9600...115200 Baud	
Type of connector	RJ11	

AC1303



AS-Interface PLC

ControllerE 1Mstr 1RS232C

Usage type	Programming
Note on interfaces	electrically isolated

Operating conditions

Ambient temperature	[°C]	0...60
Storage temperature	[°C]	-20...70
Max. relative air humidity	[%]	95
Protection		IP 20

AS-i classification

AS-i version	2.1
AS-i master profile	M3
AS-i certificate	61101

Mechanical data

Weight	[g]	507.2
Housing		housing for DIN rail mounting
Dimensions	[mm]	86 x 131 x 107
Material		aluminum; steel sheet galvanized

Displays / operating elements

Display	Function	1 x LED, red
		2 x LED, green
		2 x LED, yellow
		full graphic LCD display

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connection

