


PS3407



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M PUR CABLE

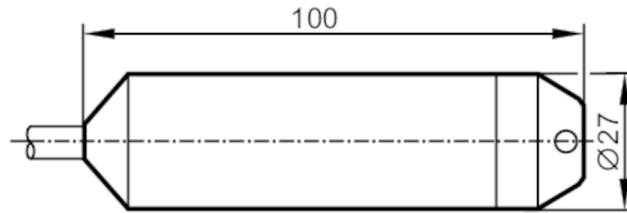

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1				
Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...240.9 inH ₂ O	0...60 kPa

Application

Design	with capillary tube for pressure compensation				
Application	for industrial applications				
Media	Liquids				
Medium temperature [°C]	-10...50				
Min. burst pressure	4.8 bar	70 psi	480 kPa		
Pressure rating	4 bar	58 psi	400 kPa		
Type of pressure	relative pressure				

Electrical data

Operating voltage [V]	10...30 DC				
Protection class	III				
Reverse polarity protection	yes				

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1				
------------------------------	-----------------------------	--	--	--	--

Outputs

Total number of outputs	1				
Output signal	analog signal				
Number of analog outputs	1				
Analog current output [mA]	4...20				
Max. load [Ω]	700; (U _b = 24 V; (U _b - 10 V) / 20 mA)				
Short-circuit protection	yes				

Measuring/setting range

Measuring range	0...0.6 bar	0...600 mbar	0...8.7 psi	0...240.9 inH ₂ O	0...60 kPa
-----------------	-------------	--------------	-------------	------------------------------	------------

Accuracy / deviations

Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)				
Characteristics deviation [% of the span]	< 0,5 (BFSL) / 1; (incl. linearity, zero and span error (limit value setting))				
Linearity deviation [% of the span]	< 0,2 (BFSL)				
Long-term stability [% of the span]	< 0,2; (per year)				
Temperature coefficient zero point	< ± 0,2; (0...50 °C)				

PS3407



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 0,6BAR 10M PUR CABLE

[% of the span / 10 K]	
Temperature coefficient span [% of the span / 10 K]	< ± 0,2; (0...50 °C)

Operating conditions	
Ambient temperature [°C]	-10...50
Storage temperature [°C]	-30...80
Protection	IP 68


Tests / approvals	
MTTF [years]	403
Pressure equipment directive	sound engineering practice; can be used for group 2 fluids; group 1 fluids on request

Mechanical data	
Weight [g]	906.85
Housing	tubular
Dimensions [mm]	Ø 27 / L = 100
Material	stainless steel (1.4571/316Ti); PA

Remarks	
Pack quantity	1 pcs.

Electrical connection	
Cable: 10 m, PUR, Ø 7.5 mm; Core insulation:., PVC	

Connection

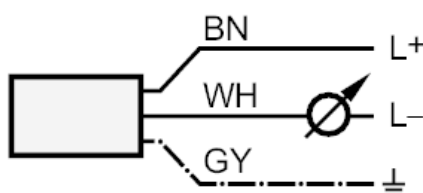

Core colors :
 BN = brown
 GY = grey
 WH = white