




Hydrostatic submersible pressure transmitter

SUBMERSIBLE 1BAR 15M PUR CABLE

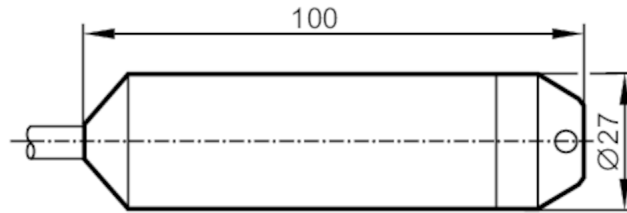

Product characteristics

Number of inputs and outputs	Number of analog outputs: 1				
Measuring range	0...1 bar	0...1000 mbar	0...14.5 psi	0...401.5 inH ₂ O	0...100 kPa

Application

Design	with capillary tube for pressure compensation		
Application	for industrial applications		
Media	Liquids		
Medium temperature [°C]	-10...50		
Min. burst pressure	6 bar	87 psi	600 kPa
Pressure rating	5 bar	72.5 psi	500 kPa
Type of pressure	relative pressure		

Electrical data

Operating voltage [V]	10...30 DC
Protection class	III
Reverse polarity protection	yes

Inputs / outputs

Number of inputs and outputs	Number of analog outputs: 1
------------------------------	-----------------------------

Outputs

Total number of outputs	1
Output signal	analog signal
Number of analog outputs	1
Analog current output [mA]	4...20
Max. load [Ω]	700; (U _b = 24 V; (U _b - 10 V) / 20 mA)
Short-circuit protection	yes

Measuring/setting range

Measuring range	0...1 bar	0...1000 mbar	0...14.5 psi	0...401.5 inH ₂ O	0...100 kPa
-----------------	-----------	---------------	--------------	------------------------------	-------------

Accuracy / deviations

Repeatability [% of the span]	< 0,1; (with temperature fluctuations < 10 K)
Characteristics deviation [% of the span]	< 0,5 (BFSL) /1; (incl. linearity, zero and span error (limit value setting))
Linearity deviation [% of the span]	< 0,2 (BFSL)
Long-term stability [% of the span]	< 0,2; (per year)
Temperature coefficient zero point	< ± 0,2; (0...50 °C)

PS3417



Hydrostatic submersible pressure transmitter

SUBMERSIBLE 1BAR 15M PUR CABLE

	[% of the span / 10 K]	
Temperature coefficient span	[% of the span / 10 K]	$< \pm 0,2; (0...50\text{ }^{\circ}\text{C})$

Operating conditions		
Ambient temperature	[°C]	-10...50
Storage temperature	[°C]	-30...80
Protection		IP 68

Tests / approvals		
MTTF	[years]	403
Pressure equipment directive		sound engineering practice; can be used for group 2 fluids; group 1 fluids on request


Mechanical data		
Weight	[g]	1284.55
Housing		tubular
Dimensions	[mm]	Ø 27 / L = 100
Material		stainless steel (1.4571/316Ti); PA

Remarks		
Pack quantity		1 pcs.

Electrical connection

Cable: 15 m, PUR, Ø 7.5 mm; Core insulation:, PVC

Connection

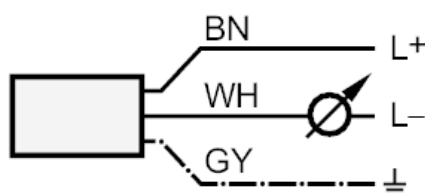

BN = Core colors :
GY = brown
WH = grey
WH = white