

# RB6031




## Incremental encoder with solid shaft

RB-0010-I24/L9

Article no longer available - archive entry

Alternative articles: RB6001

When selecting an alternative article and accessories please note that technical data may differ!

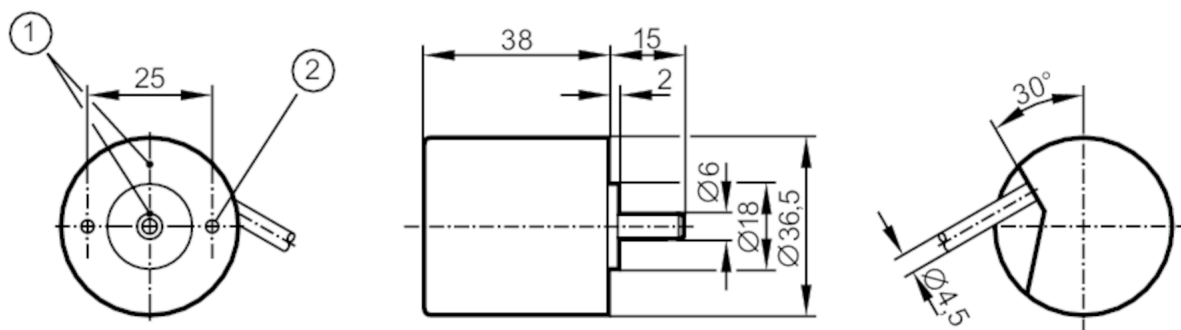

- 1 reference mark
- 2 M3 Depth 5 mm



### Product characteristics

Resolution	10 resolution
Shaft design	solid shaft
Shaft diameter [mm]	6

### Electrical data

Operating voltage [V]	10...30 DC
Current consumption [mA]	150

### Outputs

Electrical design	HTL
Max. current load per output [mA]	50
Switching frequency [kHz]	160
Type of short-circuit protection	< 60 s
Phase difference A und B [°]	90

### Measuring/setting range

Resolution	10 resolution
------------	---------------

### Operating conditions

Ambient temperature [°C]	-20...70
Storage temperature [°C]	-30...100
Max. relative air humidity [%]	98
Protection	IP 64

### Tests / approvals

Shock resistance	100 g (6 ms)
Vibration resistance	10 g (55...2000 Hz)

# RB6031




## Incremental encoder with solid shaft

RB-0010-I24/L9

Mechanical data		
Dimensions	[mm]	Ø 36.5 / L = 38
Material		aluminum
Max. revolution, mechanical	[U/min]	10000
Max. starting torque	[Nm]	1
Reference temperature torque	[°C]	20
Shaft design		solid shaft
Shaft diameter	[mm]	6
Shaft material		steel (1.4104)
Max. shaft load axial (at the shaft end)	[N]	5
Max. shaft load radial (at the shaft end)	[N]	10

Electrical connection	
Cable: 9 m, PUR; radial, can also be used axially	
white/green	0V
brown/green	L+
brown	A
green	0V A
grey	B
pink	0V B
red	0 index
black	0V 0 index
lilac	error inverted
screen	housing

Diagrams and graphs	
Pulse diagram	<div><p>Direction of rotation clockwise (looking at the shaft)</p></div>