

ST3609




Flow monitor

SCR12ABBFPKG/US-100-IPF

Article no longer available - archive entry

Alternative articles: SI5000 + E40096

When selecting an alternative article and accessories please note that technical data may differ!

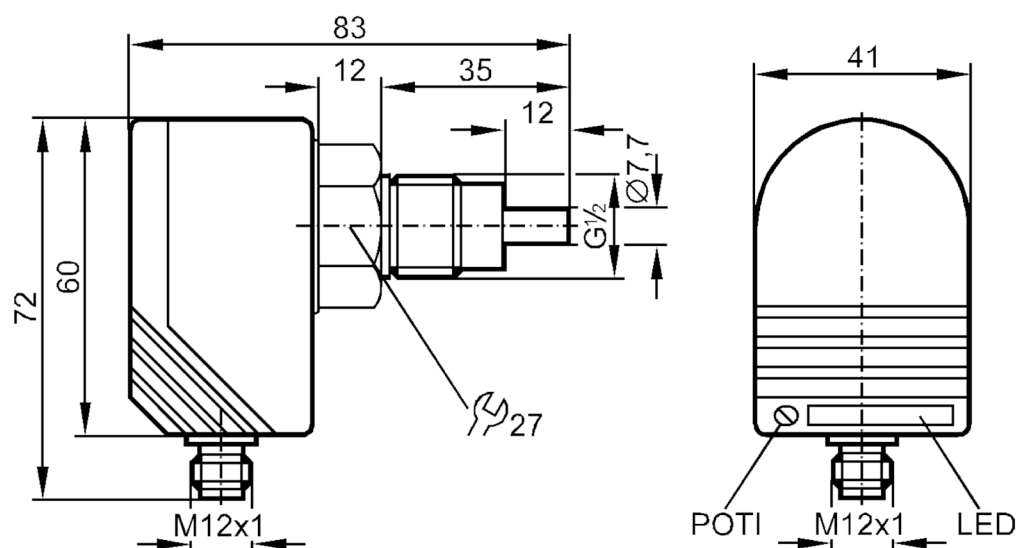

Product characteristics

Number of inputs and outputs	Number of digital outputs: 1
Process connection	G 1/2 external thread

Application

Media		Liquids
Medium temperature	[°C]	-25...80
Pressure rating	[bar]	30

Electrical data

Operating voltage	[V]	20...36 DC
Current consumption	[mA]	< 45
Reverse polarity protection		yes
Power-on delay time	[s]	< 20

Inputs / outputs

Number of inputs and outputs	Number of digital outputs: 1
------------------------------	------------------------------

Outputs

Total number of outputs	1
Output signal	switching signal
Electrical design	PNP
Number of digital outputs	1

ST3609



Flow monitor

SCR12ABBFPG/US-100-IPF

Output function	normally open / closed; (configurable)	
Max. voltage drop switching output DC [V]	2.5	
Permanent current rating of switching output DC [mA]	400	
Short-circuit protection	yes	
Type of short-circuit protection	yes (non-latching)	
Overload protection	yes	

Measuring/setting range

Setting range [cm/s]	3...300
Greatest sensitivity [cm/s]	3...60

Accuracy / deviations

Max. temperature gradient of medium [K/min]	15
---	----

Reaction times

Response time [s]	1...10
-------------------	--------

Software / programming

Adjustment of the switch point	potentiometer
--------------------------------	---------------

Operating conditions

Ambient temperature [°C]	-20...80
Protection	IP 67

Mechanical data

Material	PBT-GF20
Materials (wetted parts)	stainless steel (1.4571/316Ti)
Process connection	G 1/2 external thread

Displays / operating elements

Display	Function	11 x LED
---------	----------	----------

Accessories

Items supplied	sealings: 2 x AMF 30 screwdrivers
----------------	--------------------------------------

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Connector: 1 x M12; coding: A





ST3609



Flow monitor

SCR12ABBFPKG/US-100-IPF

Connection

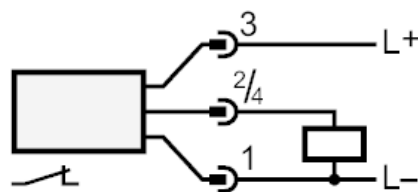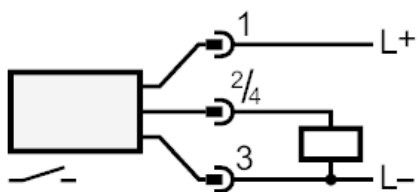

BN = Core colors :
BU = brown
BK = blue
black