


# TM5331



## Temperature sensor with process connection

TM-100KCBN12- /US/

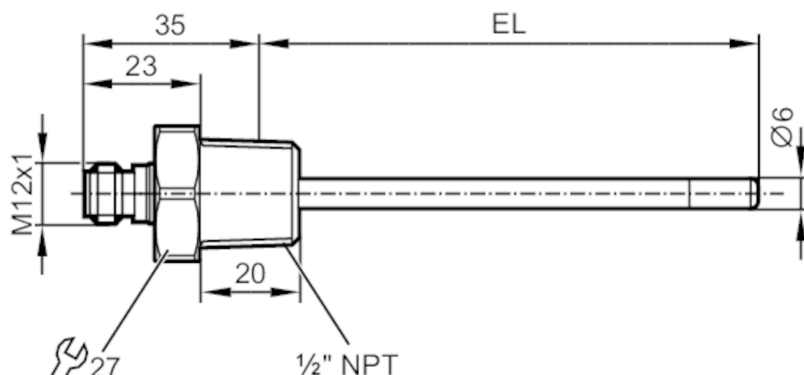

### Product characteristics

Measuring range	-40...150 °C	-40...302 °F
Process connection	threaded connection 1/2" NPT	
Installation length EL [mm]	100	

### Application

System	gold-plated contacts	
Measuring element	1 x Pt 1000; (to DIN EN 60751, class A)	
Media	liquids and gases	
Pressure rating [bar]	160	
Minimum installation depth [mm]	15	

### Electrical data

Protection class	III
------------------	-----

### Measuring/setting range

Probe length L	[mm]	92	
Measuring range		-40...150 °C	-40...302 °F

### Accuracy / deviations

Accuracy [K]	$\pm (0,15 K + 0,002 x t )$
--------------	-----------------------------

### Reaction times

Dynamic response T05 / T09 [s]	1 / 3; (according to DIN EN 60751)
--------------------------------	------------------------------------

### Operating conditions

Ambient temperature [°C]	-25...80
Storage temperature [°C]	-40...100
Protection	IP 68; IP 69K

### Tests / approvals

Shock resistance	DIN EN 60068-2-27	50 g (11 ms)
Vibration resistance	DIN EN 60068-2-6	10 g (10...2000 Hz)
MTTF [years]	22831	
UL approval	UL approval number	K004

# TM5331



## Temperature sensor with process connection


TM-100KCBN12- /US/

Mechanical data		
Weight	[g]	144.5
Material		stainless steel (1.4404 / 316L)
Materials (wetted parts)		stainless steel (1.4404 / 316L)
Process connection		threaded connection 1/2" NPT
Probe diameter	[mm]	6
Installation length EL	[mm]	100

Remarks		
Remarks		cULus - Class 2 source required
		The values for accuracy apply to flowing water.
Pack quantity		1 pcs.

### Electrical connection

Connector: 1 x M12; coding: A; Contacts: gold-plated



### Connection

