

N00219




Switching amplifiers for Namur sensors

NV0201 230VAC,RL

Article no longer available - archive entry

Alternative articles: N0033A

When selecting an alternative article and accessories please note that technical data may differ!

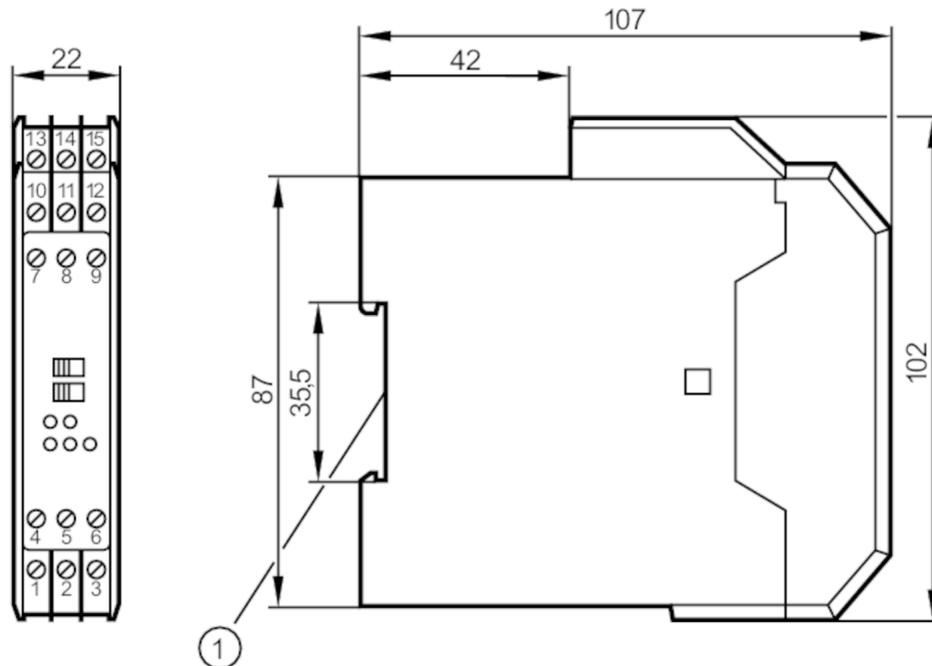

1 mounting on DIN rail



Application

Application short-circuit monitoring; Wire monitoring

Electrical data

Operating voltage tolerance [%]	-15...10
Operating voltage [V]	< 230 AC
Number of channels	2

Outputs

Electrical design	relay
Contact rating	5 A, 250 V AC / 100 VA
Switching frequency AC [Hz]	20

Operating conditions

Ambient temperature [°C]	-20...60
Protection	IP 30
Protection rating terminals	IP 20

Tests / approvals

Approval	PTB Ex-95.C.2142X
----------	-------------------



Switching amplifiers for Namur sensors

NV0201 230VAC,RL

Safety classification	
Designation	in protection rating intrinsic safety
Voltage [V]	< 11
Current [mA]	< 26
Power [mW]	< 72
[Ex ia] IIC designation	[EEx ia] IIC
[Ex ia] IIB designation	[EEx ia] IIB
[Ex ib] IIC designation	[EEx ib] IIC
[Ex ib] IIB designation	[EEx ib] IIB
[Ex ia] IIC inductance	1mH / 2mH / 5mH
[Ex ia] IIB inductance	1mH / 2mH / 5mH
[Ex ib] IIC inductance	46mH
[Ex ib] IIB inductance	170mH
[Ex ia] IIC capacitance	567nF / 581nF / 483nF
[Ex ia] IIB capacitance	2.5µF / 2.2µF / 1.8µF
[Ex ib] IIC capacitance	2.5µF
[Ex ib] IIB capacitance	15µF


Mechanical data	
Housing	housing for DIN rail mounting
Dimensions [mm]	102 x 22 x 107

Displays / operating elements		
Display	switching status	2 x LED, yellow
	operation	LED, green
	function	2 x LED, red

Remarks	
Pack quantity	1 pcs.

Electrical connection	
terminals: 15 x ...2.5 mm ²	

Connection

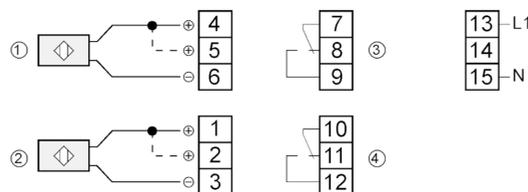

- 1: sensor 1
 - 2: sensor 2
 - 3: Relais 1
 - 4: Relais 2
- link 4-5 / 1-2 = without wire-break monitoring